


Product View



-7500

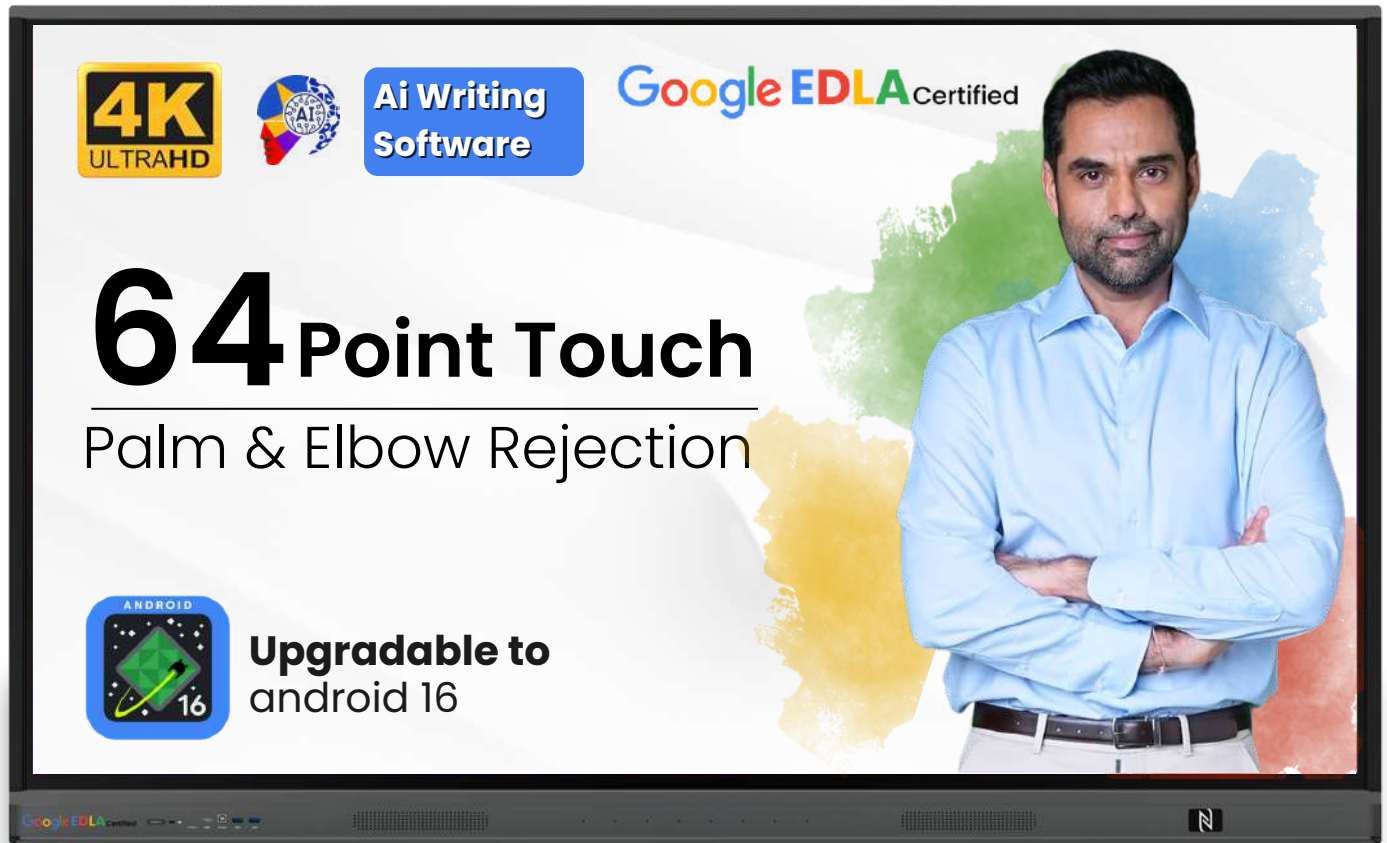

Wide Range of **Interactive Flat Panels**

Available in All Sizes: 65", 75", 86", 98", 105"



Android 14 Upgradable
to Android 16



64 Point
Touch



AI inbuilt



MK9679
Taiwan Chipset



MDM



8 Array
Microphone



K12 Educational
Lifetime Content



NFC



Palm & Elbow
Rejection



Google
Assistant




128 GB
Expandable upto 1TB



Surround Sound

Product View

-7500

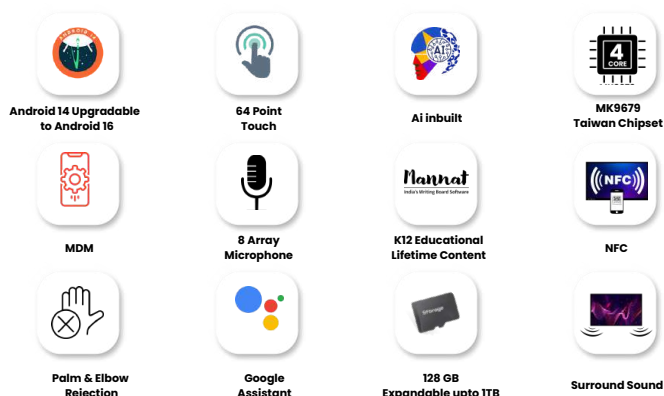

Specifications

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	75"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1649.66(H)x927.93(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED
MICROPHONE & NFC	FRONT BUILD IN	-	NFC		
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	-	SCREEN SHARING AND DATA TRANSFER		
AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER	
		2.1 CHANNEL	15 X 2 WATT	20 WATT	
TOUCH PARAMETERS	TOUCH SPECIFICATIONS		SUPPORT SYSTEM		OUTPUT CO-ORDINATES
	NON-CONTACT INFRARED SENSING TECHNOLOGY		WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		
SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	Quad Core 1.5GHZ	G52 - MC1	8GB	128GB
WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	
REAR I/O INTERFACE	HDMI IN	USB2.0	USB 3.0	HDMI OUT	USB TOUCH PORT
	2	1	1	1	2
	LINE OUT	OPTICAL OUT	LAN RJ 45 IN	LINE OUT	RS232
	2	1	1	1	1
	Type c Port	DP in	VGA INPUT PORT	TF CARD	AUDIO IN
	1	1	1	1	2
FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C	
	3	1	1	1	
POWER	VOLTAGE	MAX. POWER CONSUMPTION		STAND BY POWER CONSUMPTION	
	100-240 AC 50/60Hz 4A	280W		≤0.5W	
STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS		VESA HOLE SITE
	1707 × 91.8 × 1022.7mm	1873 × 270 × 1197mm	118mm (WIB9060G)		800 × 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION		
	61.8KG	81.3 KG	M8 × 25mm		
ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°C	10%-90%RH	-20°C~60°C	10%-90%RH	<5000m