


Product View

G PRO-7500

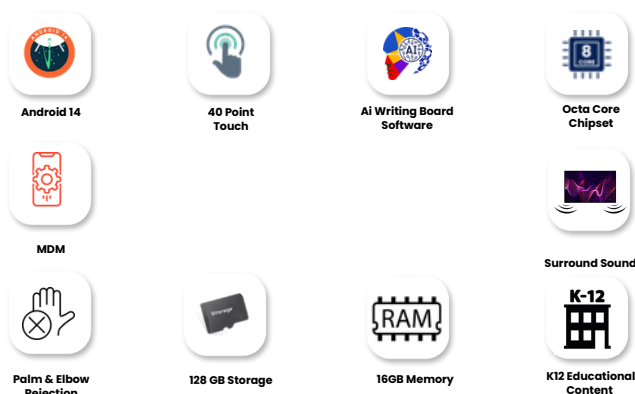

Specifications

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	75"	<8.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1649.66(H)x927.93(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2(±10%)	≥50,000 Hr.	4000:1	DLED	LCD/LED
FEATURES	Writing Board		Writing Board		OTHERS
	Ai Writing Board Software		Palm & Elbow Rejection		Surround Sound
AUDIO/VIDEO PARAMETERS	SPEAKERS		SOUND TRACK	POWER	SUBWOOFER
			2.1 CHANNEL	15 X 2 WATT	20 WATT
TOUCH PARAMETERS	TOUCH SPECIFICATIONS		SUPPORT SYSTEM		OUTPUT CO-ORDINATES
	NON-CONTACT INFRARED SENSING TECHNOLOGY		WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	40	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<8.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		
SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	Octa Core A73*4+A53*4	Mali-G52MP8 (8EE)	16GB	128GB
WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	Wireless Module S107B
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	Wireless Module S107B
REAR I/O INTERFACE	USB 3.0	USB2.0	RS232	USB TOUCH PORT	HDMI IN
	1	1	1	1	2
	HDMI OUT	OPTICAL OUT	MIC IN	AUX IN	RJ45
	1	1	1	1	1
	-	-	-	-	-
FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C	
	3	1	1	1	
POWER	VOLTAGE	MAX. POWER CONSUMPTION		STAND BY POWER CONSUMPTION	
	100-240 AC 50/60Hz 4A	280W		≤0.5W	
STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS		VESA HOLE SITE
	1707 × 91.8 × 1022.7mm	1873 × 270 × 1197mm	118mm (W1B9060G)		800 × 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION		
	61.8KG	81.3 KG	M8 × 25mm		
ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C-40°C	10%-90%RH	-20°C-60°C	10%-90%RH	<5000m