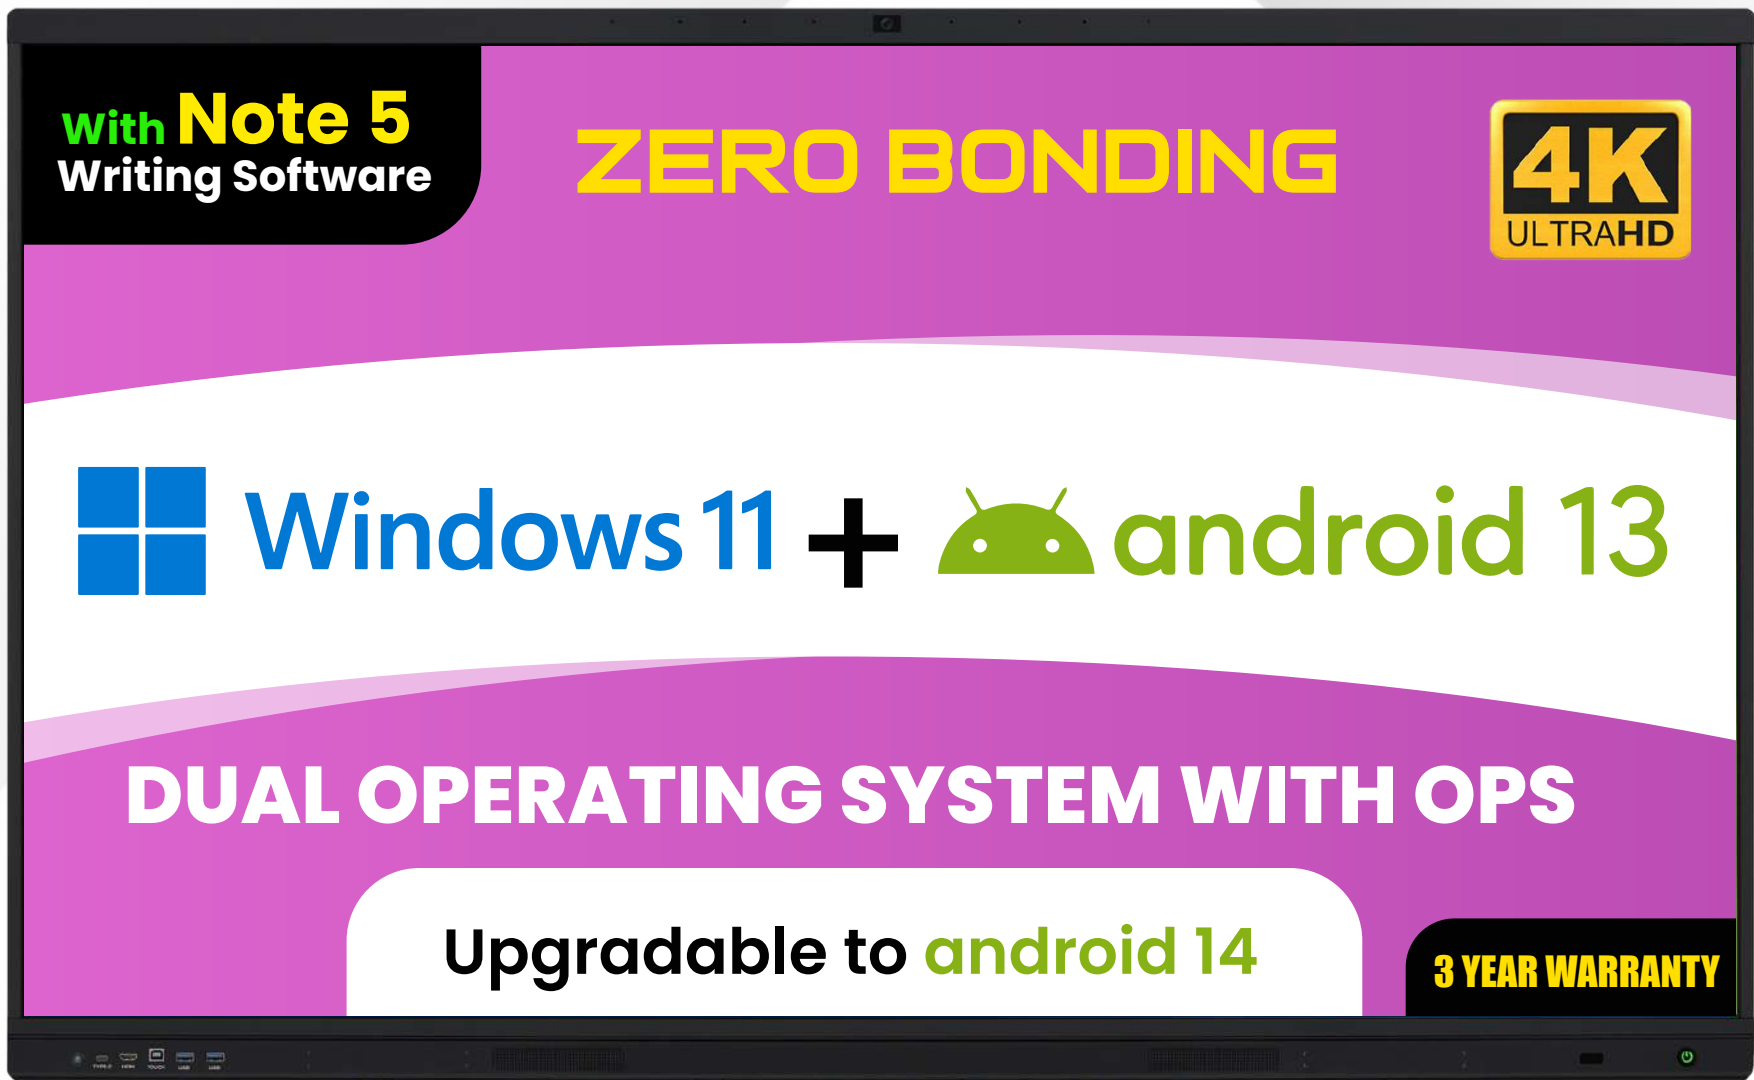




- 

Android 13
Operating System
- 

4k ULTRA HIGH
DEFINATION
- 

48 MP
Camera
- 

Available upto 8gb
System Memory
- 


Primary - 128GB
- 


Wireless Screen
Sharing
upto 9 devices
- 

Front Type
C USB Port
- 

Anti Finger
Touch
- 

Usb 3.0 x 3 ports
In Front
- 

OPS INCLUDED
- 

OPS Dual
Operation
System
- 

Interchangable OPS

SPECIFICATIONS

PANEL	Size	Respond Time	Visual Ratio	Panel Type	Display Colours
	86"	4ms	16:9	BOE/LG IPS Panel	1.07B (10bit)
	Frequency	Max Visual Area	Resolution	Pixel Pitch	Colour Saturability
	60 Hz	1895.04(H)x1065.96(V)mm	3840(H) x 2160(V)	0.4935 x 0.4935 mm	72%
	Brightness	Life Span	Contrast Ratio	Light Source	View Angle
400cd/m2	≥50000hrs	4000:1	DLED	178° (H/V)	
AUDIO VIDEO PARAMETERS	SPEAKERS	Sound Track		Power	
		2.0		2 x 20W	
TOUCH PARAMETERS	Touch Specifications		Support System		Output Coordinates
	Non-contact infrared sensing technology		Windows 10/ Windows 8/ Windows 7/ Windows XP/ Android/ Linux/ Mac OS X/ Chrome		32767(W) x 32767 (D)
	Touch Points	Min. Identifier	Writing Display		Writing Height
	20 Points touch	2 mm	Single Stylus Pen 2 Colour		≤3mm
	Respond Time	Touch Depth	Input Mode		
≤10ms	±1mm	Opaque object (finger, Pen, etc)		-	
SYSTEM	Version	CPU	GPU	RAM	ROM
	Android 13	Quad Core A55 2.1 Ghz	Mali G52MP2	8GB System Memory	128GB System Storage
CAMERA & MICROPHONE	Front Build In		Sensor Size		
	8 Array Microphone and 10 Mtr Pickup Distance		48MP Sensor for 12MP Tetra Bayer with 1/2 optics		
	Viewing Angle		Video Format		
	D114.9 H102.1 V85.7 ± 3°		MJPG/H264/H265		-
	RESOLUTION				
	15FPS@mjpg	30FPS@mjpg/h264/h265		10FPS @YUY2	30FPS @YUY2
	4000 x 3000	3840x2160, 2560x1440, 1920x1080, 1280x720		1280 x 720	640 x 480, 320 x 240
	1024 x 768, 640 x 480, 640 x 360, 320 x 180		-	-	
WIRELESS	BLUETOOTH	Version	Working Frequency	Working Distance	Remark Via
		5	2.4 GHz	Upto 10 mtrs.	Wireless Module S107B
	WIFI	Version	Working Frequency	Working Distance	Remark Via
		802.11ac/bg/n/a/x	2.4 GHz/5GHz	Upto 10 mtrs.	Wireless Module S107B
REAR I/O INTERFACE	HDMI IN	USB 2.0	USB 3.0	USB Touch Port	Audio In
	2	1	2	1	1
	Line Out	Optical Out	Display Port	VGA Input Port	HDMI Out
	1	1	1	1	1
	Type C Port	RS 232	LAN RJ 45 Out	LAN RJ 45 In	
1 Full Function	1	1	1	-	
FRONT INTERFACE	USB 3.0	Touch USB	HDMI I	Type C	TF Card
	2	1	1	1	1
POWER	Voltage	Max. Power Consumption		Standby Power Consumption	
	100-240AC 50/60 Hz 4A	380W		≤0.5W	
STRUCTURE	Bare Dimension	Packing Dimension	Machine + Wall Mount Thickness		VESA Hole Site
	1953.4 x 92 x 1161.4mm	2135 x 270 x 1332mm	130mm (WIB9060G)		800 x 600mm
	Net Weight	Gross Weight	Wall Mounting Screw Specifications		
	74.4 Kg	95.3 Kg	M8 x 25mm		-
ENVIRONMENT	Working Temperature	Working Humidity	Storage Temperature	Storage Humidity	Working Elevation
	0°C~40°C	10%~90%RH	-20°C~60°C	10%~90%RH	<5000m
OPS	Processor Options	Generation Options	System Memory Options	RAM Options	Certifications Options
	Intel® Core™ i3, i5 & i7	10th, 11th & 12th Gen	128GB to 2TB	4GB to 16GB	CE,FCC,ROHS, ISO 9001 : 2008, ISO 14001