

Product View

G PRO-9800A



Wide Range of **Interactive Flat Panels**

Available in All Sizes: 65", 75", 86", 98"



Android 14 Upgradable to Android 16



64 Point Touch



AI inbuilt



A311D2 Octa Core American Chipset



MDM



8 Array Microphone



K12 Educational Lifetime Content



NFC



Palm & Elbow Rejection



Google Assistant




256GB Expandable upto 1TB



Surround Sound

Product View

GPRO-9800A

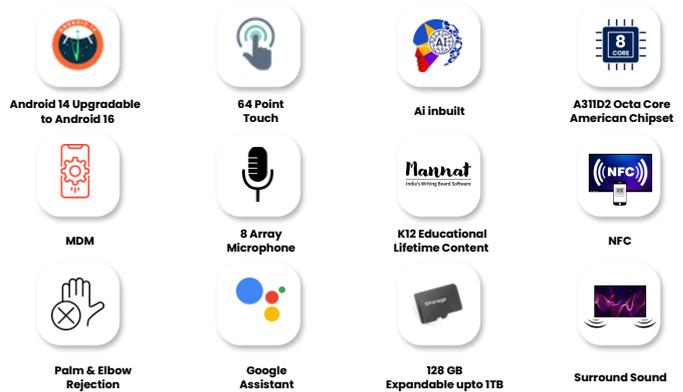

Specifications

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	98"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1895.04(H)x1065.96(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
400cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED	
MICROPHONE & NFC	FRONT BUILD IN			NFC	
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE			SCREEN SHARING AND DATA TRANSFER	
AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER	
		2.1 CHANNEL	15 X 2 WATT	20 WATT	
TOUCH PARAMETERS	TOUCH SPECIFICATIONS		SUPPORT SYSTEM		OUTPUT CO-ORDINATES
	NON-CONTACT INFRARED SENSING TECHNOLOGY		WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
RESPOND TIME	TOUCH DEPTH	INPUT MODE			
<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)			
SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	A73*4+A53*4	Mali-G52MP8 (8EE)	8GB	128GB
WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	
REAR I/O INTERFACE	MIC IN	USB2.0	USB 3.0	HDMI IN	USB TOUCH OUT
	1	1	1	2	1
	HDMI OUT	OPTICAL OUT	LAN RJ 45 IN	LINE OUT	RS232
	1	1	1	1	1
	TF CARD				
1					
FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C	
	2	1	1	1	
POWER	VOLTAGE	MAX. POWER CONSUMPTION	STAND BY POWER CONSUMPTION		
	100-240 AC 50/60Hz 4A	280W	≤0.5W		
STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS	VESA HOLE SITE	
	2261.6 × 103 × 1351mm	2464 × 260 × 1518mm	130mm (WIB9060G)	800 × 600mm	
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION		
	147 KG	168 KG	M8 × 25mm		
ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C-40°C	10%-90%RH	-20°C-60°C	10%-90%RH	<5000m